




# BAVARIA® Wall Fire Cabinet

Type

## BAVARIA FCR-1½

### Applications:

Bavaria FCR -1½ wall Fire Cabinet with flat hose is suitable for use in both areas outdoors & indoors, as in offices, schools, sports areas, cinemas, assembly rooms, hotels, resorts, malls, airports, hospitals industrial and commercial fire protection needs , such as manufacturing, warehouse, auto repair shops, apartment buildings, malls, restaurants, and many others

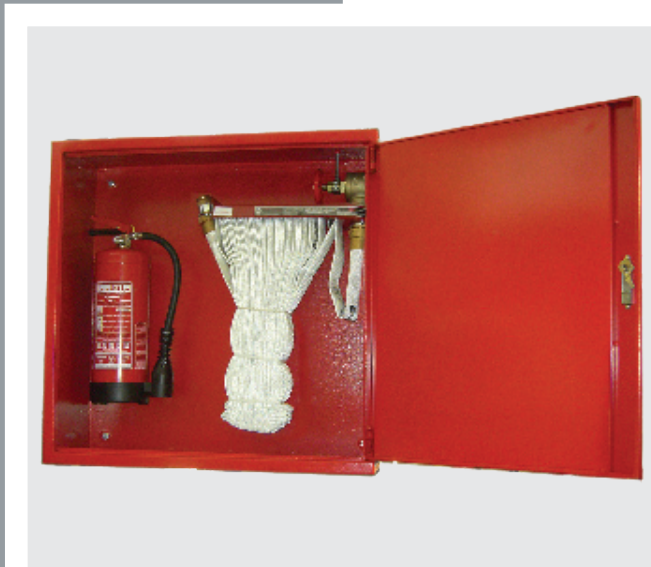

**BAVARIA** EGYPT (S.A.E.)  
Gisr El Suez St. Block 109, Industrial Zone,  
Ismailia Desert Road, Cairo-Egypt  
PO Box: 2016/11111 Cairo-Egypt

Tel. : + 20 (2) 2698 9443 / 5 / 6  
Fax : + 20 (2) 2698 8447  
Website : [www.bavaria-firefighting.com](http://www.bavaria-firefighting.com)  
Email : [international.sales@bavaria.com.eg](mailto:international.sales@bavaria.com.eg)



**BAVARIA** Brandschutz Industrie GmbH & Co. KG  
Regensburger StraBe. 16,  
D-93449 Waldmünchen  
Germany

Tel. : + 49 (0) 9972 9401-0  
Fax : + 49 (0) 9972 9401-17  
Website : [www.bavaria-firefighting.de](http://www.bavaria-firefighting.de)  
Email : [info@bavaria-firefighting.de](mailto:info@bavaria-firefighting.de)



## BAVARIA® Wall Fire Cabinet

Type: BAVARIA FCR -1½

### Features:

- A rack design fire cabinet equipped with a flat nylon hose with internal rubber lining
- Standard design for wall mounting and can be manufactured upon request as a recessed type for in-wall fitting type BAVARIA FCR-1½-R
- The cabinet door hinges enabling it to swing up to 180°
- The cabinet has inlet holes for a water feeding pipe for easy connection to a water source.
- Lockable through quick opening lock



Manufactured according to American Standards NFPA  
 The Rack is awarded UL and FM mark  
 Quality Management System ISO 9001:2000 / ISO 14001 / OHSAS 18001  
 Bavaria Laboratory Accredited According to the ISO/IEC 17025

### Technical Specifications:

<b>Cabinet type</b>	<b>BAVARIA FCR-1½</b>
Cabinet Dimensions (wxhxd) cm	86x86x30 (other variations are possible)
Cabinet Material	According to DIN EN 10130
Single Opening Door	Right (standard) or left (option )
Cabinet Steel Thickness	1.5 mm
Paint Finish	Surface treatment 100% polyester coating
<b>Hose Rack Internally Rubber-Lined Flat Nylon Hose</b>	
Hose Diameter	38 mm (1½ inch)
Hose Length	30 m
Optimum Working Pressure Range	5-12 bar
Hose Bursting Pressure	Over 48 bar
Rack Swinging Range	0° - 90°
Discharge Fitting	Water branchpipe nozzle and a 63 mm (2½ inch) Morris coupling
Accessories	Gate valve with Morris coupling 63 mm (2½ inch)

### Warranty:

Period of Warranty	2 Years
Coverage of the Warranty	Against material failure and production defects
Method of Warranty Coverage	Limited to the replacement of the defected part or product after verification that the failure is covered by the scope of the warranty
Warranty Exclusions	Failures due to misuse, mishandling, or inspection or repair by an unauthorized dealer or entity

\* The illustrations may show optional extras only available at extra charge. BAVARIA retains the right to alter specifications and illustrations given herein without prior notice. Specifications will only be considered communicated at placing of order.